

Summary

GK-350 is highly compressible silicon foam. As a low-soft silicone foam, it has excellent resiliency, good weather resistance and long-term stability. The advantages of light weight, high flexibility and good flame retardance make it possible to provide impact and thermal protection for electronic equipment, as well as reduce shock and isolate vibration for the device. Thickness selection is extensive and easy to process.

Features

- Range of thickness from 0.8~20mm
- Tight tolerances and softness, and unique compression set, ideal for demanding sealing application.
- Excellent weather resistance
- Meets the most stringent UL-94 flame rating available, V-0 and HF-1
- Low stress relaxation reduces maintenance costs associated with gasket failures due to compression set and softening

Applications

- Application in lighting, HVAC and electrical control cabinets
- Environmental sealing, providing protection against wind-driven rain and fire.
- Cushion and gasket

Storage

Without Adhesive

- Temperature: 10°C~35°C
- Relative Humidity: 40%~70%

With Adhesive

- Temperature: 18°C~30°C
- Relative Humidity: 45%~55%

Shelf-life

Without Adhesive: 10 years


With Adhesive: According to the type of adhesive

Acrylate adhesive: 18 months

Silicon adhesive: 6 months

Physical Properties	Test Method	Typical Value
Product		GK-350
Density, kg/m³	ASTM D 1056	350
Thickness, mm Tolerance, %		0.8~20 ± 10
Compression Set % max, 50%, 100°C	ASTM D 1056	<5%
Compression Force Deflection, kPa	ASTM D 1056	30
Tensile strength kPa (min)	ASTM D 412	200
Tensile Strength % (min)	ASTM D 412	60
Flame Resistance	UL94	V-0, HF-1
Water Absorption	Internal	<5%
Color	visual	gray、black
Recommended Temperature		-55°C~200°C

GK-350 CFD curve

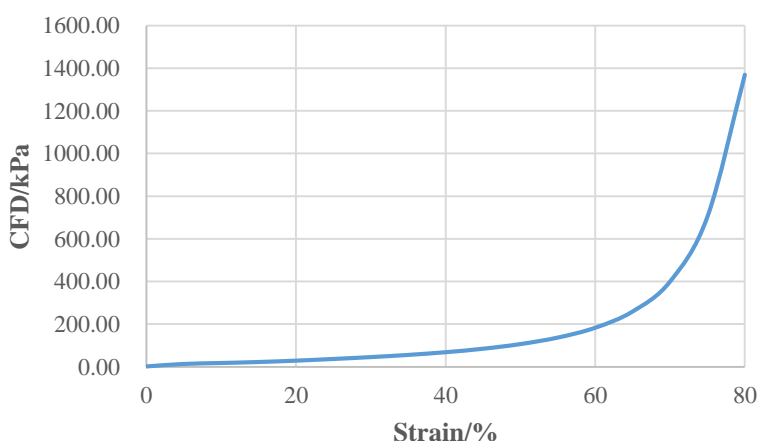

The true and reliable data information contained in this information is intended to assist you in the design of the use of the Guangmai silica gel foam material, based on the scope of application of the product determined by our current cognition and experience, unintentionally and does not constitute any warranty, express or implied, including any warranties of merchantability to the commodity, fitness for special purposes, and does not guarantee that the user can achieve the results shown in this data for a particular purpose. For applications outside the scope, or for use under different conditions and environments, the resulting results will not be liable. Therefore, we strongly recommend that the user determine the suitability of the silica gel material before use.

Address: 16B Building, International Finance IT Research Development Center, NO.5 Keji Ten Road, Songshan Lake High-Tech Industrial Development Zone, Dongguan City, China Tel: 0769-26621791

<http://www.guangmai.com>